


# MKT MACHINING

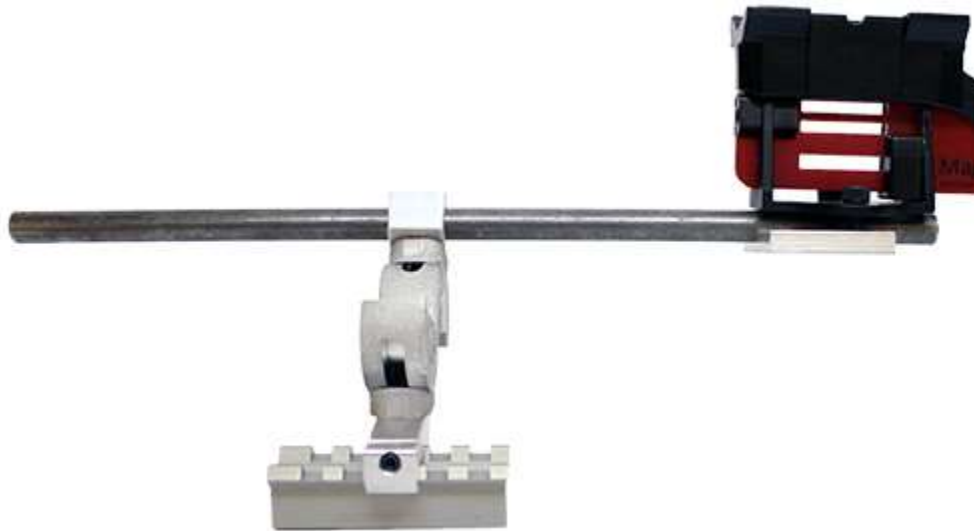

## *Gen I Magnetospeed Mount Instructions*

**Thanks for purchasing our Magnetospeed Rail Mount Adapter. This mount is made from aircraft-grade 6061 Aluminum, & Type III Hardcoat Anodized for a highly durable finish.**

**To install your mount, separate the two halves of the rail mount section, and install on your picatinny rail using 15-20 in/lbs of torque. Set screws allow rotation of the bayonet itself and length adjustment. The two larger bolts in the "S" allow for multiple axis of movement to position the Magnetospeed. Tighten securely to prevent movement, longer rod position and/or higher recoil rifles will need more torque on these bolts to prevent movement. Barely loosen bolts to allow for easiest adjustment of the magneto mount.**

**To install bayonet onto plate, insert bolts through bayonet bracket then thread into the plate, while clamping the adjustment rod.**

**MAKE SURE YOU AREN'T GOING TO SHOOT YOUR BAYONET BEFORE FIRING!**